



designline™

Job Name	Item #
Location	
Engineer	Contractor
PO #	Tag
Representative	

DESIGNLINE® LINEAR SHOWER DRAINS TECHNICAL SPECIFICATION

DESCRIPTION

Oatey® Designline linear shower drains shall be used for tiled showers in residential and commercial applications when connecting to a DWV system. The drain body is constructed of durable and corrosion resistant 304-grade stainless steel with sloped channel to ensure proper water evacuation. Drain height can be modified using the adjustable leveling feet. The 2 in. PVC threaded outlet adapter threads into a compatible clamping collar drain base for use with shower pan liner or hot mop waterproofing applications. The decorative cover shall meet all necessary load and flow requirements for installations in shower areas. Drain kit includes a stainless steel debris basket and lifting key.

FEATURES AND MATERIALS

- 304-grade stainless steel designer grate, drain body & debris basket
- Flow Rate: 10 GPM
- 2 in. PVC threaded outlet adapter
- Lifting key for removal of drain grate
- 304-grade stainless steel debris basket

REQUIRED PARTS (NOT INCLUDED)

- 3-Piece clamping collar shower pan drain (Oatey 130 Series equivalent in PVC, ABS or cast iron for hot mop) Oatey PVC or CPE shower pan liner
- Oatey X-15 Bonding Adhesive for use with PVC shower pan liner or OateyWeld for use with CPE shower pan liner


130 SERIES SHOWER PAN DRAIN (SOLD SEPARATELY)

ABS or PVC Drain Base with Clamping Collar

Designed for use with tile or marble showers where a shower pan liner is used. The countersunk holes are used to secure the flange base to the subfloor with an approved fastener. The shower pan drain shall have a solvent weld connection over 2 in. Sch. 40 DWV hub connection or inside 3 in. Sch. 40 which conforms to ASTM D2665 (PVC) or D2661 (ABS). Base accepts 130 series 1/4 Turn Test Plug, which holds 40 ft of head pressure. Clamp collar ring fastens by use of hex bolts that thread into brass inserts and can be inverted to achieve an additional 1 in. in finished height. Drain base accepts 2 in. threaded outlet adapter which connects to Designline stainless steel drain body.

APPROVALS AND LISTINGS

- Uniform Plumbing Code
- International Plumbing Code
- National Plumbing Code of Canada
- ASME A112.18.2 / CSAB125.2

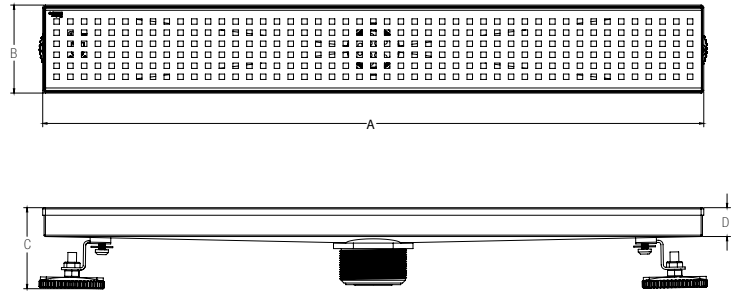

DIMENSIONS

[A]:	DL32240BG	24 IN.
	DL32240GM	
	DL32240CB	
	DL32240	
	DL32240GB	
	DLS2240R2	
	DLS1240R2	28 IN.
	DL32280	
	DLS2280R2	
	DLS1280R2	
	DLS2320R2	
	DLS1320R2	
[B]:	DLS2360R2	32 IN.
	DLS1360R2	
[C]:	3.20 IN. (3-3/16 IN.)	36 IN.
	2.94 IN. (2-15/16 IN.)	
[D]:	1.05 IN. (1-1/16 IN.)	

Access BIM/Revit content through www.oatey.com



designline™

DESIGNLINE® LINEAR SHOWER DRAINS TECHNICAL SPECIFICATION

PRODUCT SELECTOR

✓	PRODUCT NUMBER	PRODUCT DESCRIPTION	TYPE	LENGTH (IN)	GRATE DESIGN	FINISH
	DL32240BG	24 IN. SS LINEAR SQUARE GRATE BRUSHED GOLD	LINEAR	24 IN.	SQUARE	BRUSHED GOLD
	DL32240CB	24 IN. SS LINEAR SQUARE GRATE CHAMPAGNE BRONZE				CHAMPAGNE BRONZE
	DL32240	24 IN. SS LINEAR DRAIN SQUARE GRATE MATTE BLACK				MATTE BLACK
	DL32240GB	24 IN. SS LINEAR DRAIN SQUARE GRATE GOLD & BLACK				MATTE BLACK WITH GOLD TRIM
	DLS2240R2	24 IN. SS LINEAR DRAIN SQUARE GRATE RETAIL				STAINLESS STEEL
	DL32240GM	24 IN. SS LINEAR DRAIN SQUARE GUNMETAL GRAY				GUNMETAL GRAY
	DLS1240R2	24 IN. SS LINEAR DRAIN TILE-IN GRATE RETAIL			TILE-IN	STAINLESS STEEL
	DL32280	28 IN. SS LINEAR DRAIN SQUARE GRATE MATTE BLACK		28 IN.	SQUARE	MATTE BLACK
	DLS2280R2	28 IN. SS LINEAR DRAIN SQUARE GRATE RETAIL			TILE-IN	STAINLESS STEEL
	DLS1280R2	28 IN. SS LINEAR DRAIN TILE-IN GRATE RETAIL				
	DLS2320R2	32 IN. SS LINEAR DRAIN SQUARE GRATE RETAIL		32 IN.	SQUARE	
	DLS1320R2	32 IN. SS LINEAR DRAIN TILE-IN GRATE RETAIL			TILE-IN	
	DLS2360R2	36 IN. SS LINEAR DRAIN SQUARE GRATE RETAIL		36 IN.	SQUARE	
	DLS1360R2	36 IN. SS LINEAR DRAIN TILE-IN GRATE RETAIL			TILE-IN	

Access BIM/Revit content through www.oatey.com