# Datey MODA<sup>™</sup> SECONDARY DRAIN KIT TECHNICAL SPECIFICATION

#### **SPECIFICATIONS**

Oatey MODA<sup>™</sup> Secondary Drain Kits shall be used in residential or commercial applications requiring drain line access recessed in the wall. MODA<sup>™</sup> secondary drain kits contain a quarter-turn drainage funnel with umbrella, and a pre-installed inlet adapter for connection to condensate, water softener or other auxiliary drain lines. When installed, the drainage funnel and top provides a 1" air gap to the drain, while permitting the use of a washing machine hose in the same drain line. The drain connection shall include a removable quarter-turn plug for DWV testing. Box shall be manufactured of PVC, allowing solvent welded joints to be prepared in accordance with ASTM D2855 for PVC drainage systems (without the use of specialty cements). The outlet boxe shall also include inter-locking wing flanges on each side. The outlet box wing flanges shall allow installation on a single stud, or between two studs using the included side brackets. No additional components shall be required for a between stud installation.

## **APPROVALS & LISTINGS**

| Boxes               | IAPMO-Listed, PS-54       | UPC |
|---------------------|---------------------------|-----|
| Secondary Drain Kit | PS-65 (1/2" adapter only) | UPC |

### MATERIALS

| Outlet Box, Funnel & Brackets | PVC             |
|-------------------------------|-----------------|
| Plug Retention Ring           | Stainless Steel |

# **PERFORMANCE SPECIFICATIONS**

| Maximum Flow Rate | 10 Gallons per Minute |
|-------------------|-----------------------|
| Temperature Range | 250° F / 71° C        |

### DIMENSIONS


| [A]: | Box Width     | 8.00" | [E]: | Bracket Length   | 8.00" |
|------|---------------|-------|------|------------------|-------|
| [B]: | Box Depth     | 3.38" | [F]: | Faceplate Width  | 6.00" |
| [C]: | Box Height    | 4.85" | [G]: | Faceplate Height | 6.45" |
| [D]: | Bracket Width | 4.00" | [H]: | Faceplate Depth  | 1.25" |

# **PRODUCT SELECTOR**

| MODA™ CONDENSATE DRAIN KIT |                   |  |
|----------------------------|-------------------|--|
| $\checkmark$               | Product<br>Number | Description                                  |
|                            | 37557             | AUX Drn Bx, 1/2" Copper Adapter, Std Pk      |
|                            | 37985             | AUX Drn Bx, 1/2" F1807 Brass Adapter, Std Pk |
|                            | 37986             | AUX Drn Bx 1/2" F1960 Adapter, Std Pk        |
|                            | 37558             | AUX Drn Bx 1/2" CPVC Adapter, Std Pk         |
|                            | 37559             | AUX Drn Bx 3/4" Copper Adapter, Std Pk       |
|                            | 37987             | AUX Drn Bx 3/4" F1807 Brass Adapter, Std Pk  |
|                            | 37988             | AUX Drn Bx 3/4" F1960 Adapter, Std Pk        |

All products sold in case packs of 12.

| Job Name<br>Location |            | Item # |
|----------------------|------------|--------|
| Engineer             | Contractor |        |
| P0 #                 | Tag        |        |
| Representative       | _          |        |

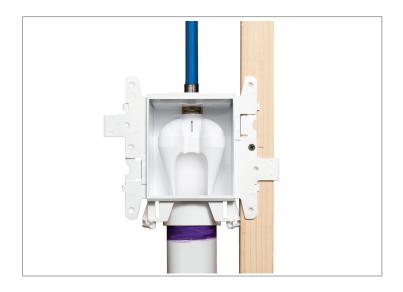

#### **Accessory Components Included:**







Sticker Cover (For Debris Protection)

Side Brackets (2)

DWV Test Plug


Faceplate


Quarter-Turn

Drainage Funnel



Funnel Top with Clip





Access BIM/Revit content through www.oatey.com