



OATEY® TOILET SUPPLY LINES TECHNICAL SPECIFICATION


Job Name _____	Item # _____
Location _____	
Engineer _____	Contractor _____
PO # _____	Tag _____
Representative _____	

SPECIFICATIONS

Oatey® Toilet Supply Lines are designed to quickly and easily connect the water supply to your toilet. Constructed of durable, high-quality corrosion-resistant material, Oatey connectors bend freely and will not kink. These supply lines come in a variety of sizes and connection types. Oatey products have earned the trust of plumbing professionals for over 100 years.

APPROVALS AND LISTINGS

Listings & Certifications	
NSF/ANSI/CAN 61-2021	IAPMO Certified
NSF/ANSI/CAN 372-2022	IAPMO Certified
ASME A112.18.6-2018/ CSA B125.6	IAPMO Certified
UPC	IAPMO Certified

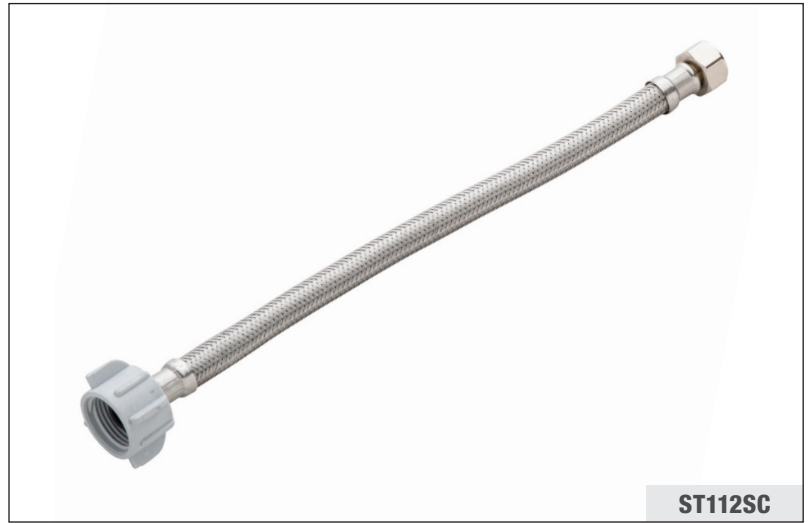


FEATURES & MATERIALS

Operating Specifications	
Temperature	40F to 160F
Pressure	125 PSI Maximum

Component	Material Composition
Inner Hose	PVC
Ferrule	304 Stainless Steel
Washer	EPDM Rubber
Compression Nut	Brass, Plated
Compression Ring	Brass, Plated
Ballcock Coupling Nut	Plastic (PolyPropolyene +30% Glass Fiber)

Tubing Diameter	0.30" ID (0.49" OD)
-----------------	---------------------

BRAIDED STAINLESS STEEL

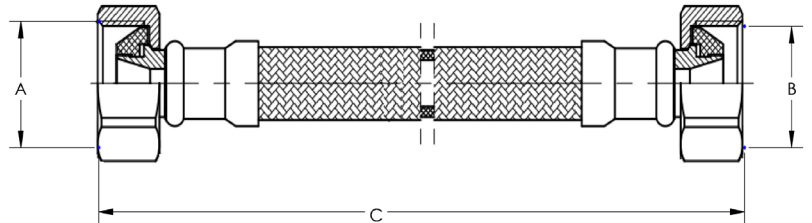

Select ✓	Product Number	Dimension A (Inlet Connection)	Dimension B (Outlet Connection)	Dimension C (Length Inches)	Case Qty
	ST10SC	3/8 COMP	7/8 Ballcock	6	25
	ST11SC	3/8 COMP	7/8 Ballcock	9	25
	ST12SC	3/8 COMP	7/8 Ballcock	12	25
	ST13SC	3/8 COMP	7/8 Ballcock	16	25
	ST15SC	3/8 COMP	7/8 Ballcock	20	25
	ST192SC	1/2 FIP	7/8 Ballcock	12	25