



# ALL-FLASH® HIGH-RISE® THERMOPLASTIC BASE NO-CALK® ROOF FLASHINGS TECHNICAL SPECIFICATION

Job Name _____	Item # _____
Location _____	
Engineer _____	Contractor _____
PO # _____	Tag _____
Representative _____	

## SPECIFICATIONS

Oatey All-Flash High-Rise Thermoplastic No-Calk Roof Flashings can be used in commercial and residential applications where a watertight seal for roof penetrations around the plumbing vent pipe is required. High-Rise Roof Flashings have a larger draw than standard roof flashings and are ideal for steep pitched roofs.

## APPROVALS AND LISTINGS


IAPMO Listed



## DESCRIPTION

All dimensions in inches.

- Roof Flashing slides over DWV pipe for pitch to 60°.
- All-Flash collar has tear-away ring allowing flashing to seal various pipe diameters.
- Non-fading, non-cracking rigid black thermoplastic base.
- Non-fading sealing collar.
- Approved for Type B installations.
- Not for hot-mopped or built-up roofs.
- Do not use paint or petroleum based products on plastic bases or rubber collars.

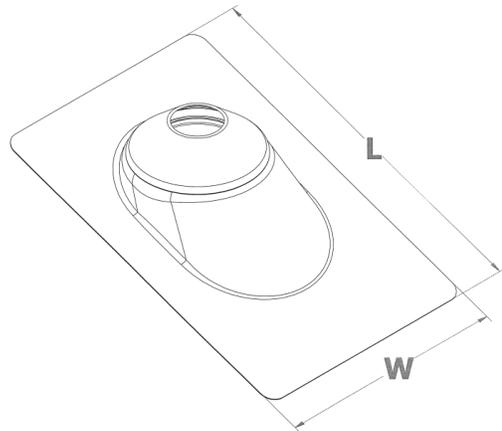

## PRODUCT SELECTOR

ALL-FLASH® HIGH-RISE® THERMOPLASTIC BASE NO-CALK® ROOF FLASHINGS						
✓	Product Number	Description	Length (L)	Width (W)	Pack	Carton Weight
	11930	1 ½" - 3" All-Flash High-Rise No-Calk Thermoplastic Roof Flashing	19	11-¼"	6	7 lbs.
	11931	3" - 4" All-Flash High-Rise No-Calk Thermoplastic Roof Flashing	20	13"	6	9 lbs.

Data is subject to manufacturing tolerances.

Access BIM/Revit content through [www.oatey.com](http://www.oatey.com)