



FLEX-FLASH™ ROOF FLASHINGS TECHNICAL SPECIFICATION

Job Name	Item #
Location	
Engineer	Contractor
PO #	Tag
Representative	

SPECIFICATIONS

Oatey Flex-Flash Roof Flashings can be used in commercial and residential applications where a watertight seal for roof penetrations around the plumbing vent pipe is required.

APPROVALS AND LISTINGS


IAPMO Listed



DESCRIPTION

All dimensions in inches.

- Roof Flashing slides over vent pipe for pitch to 45°.
- Flexible base conforms to most flat or contoured roof surfaces including clay tile.
- Non-fading sealing collar.
- Approved for Type B installations.
- Not for hot-mopped or built-up roofs.
- Do not use paint or petroleum based products on Flex-Flash product.

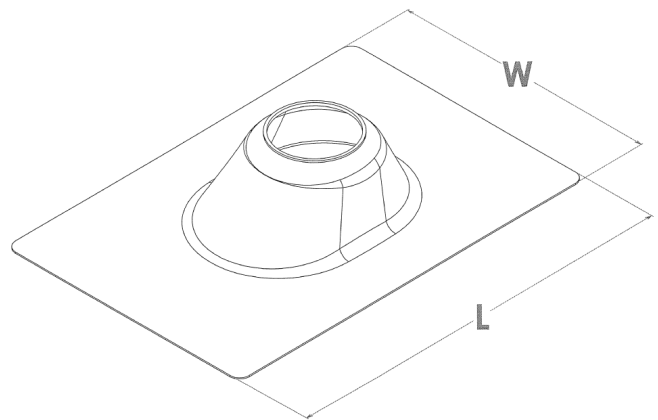

PRODUCT SELECTOR

FLEX-FLASH™ ROOF FLASHINGS						
✓	Product Number	Description	Length (L)	Width (W)	Pack	Carton Weight
	14017	1-¼" - 1-½" Flex-Flash Roof Flashing	20	20	12	6 lbs.
	14018	2" Flex-Flash Roof Flashing	20	20	12	7 lbs.
	14046	3" Flex-Flash Roof Flashing	20	20	12	9 lbs.
	14047	4" Flex-Flex Roof Flashing	20	20	12	13 lbs.

Data is subject to manufacturing tolerances.