



GALVANIZED BASE NO-CALK® ROOF FLASHINGS TECHNICAL SPECIFICATION

| | |
|----------------------|------------------|
| Job Name _____ | Item # _____ |
| Location _____ | |
| Engineer _____ | Contractor _____ |
| PO # _____ | Tag _____ |
| Representative _____ | |

SPECIFICATIONS

Oatey Galvanized Base No-Calk Roof Flashings can be used in commercial and residential applications where a watertight seal for roof penetrations around the plumbing vent pipe is required.

APPROVALS AND LISTINGS


IAPMO Listed



DESCRIPTION

All dimensions in inches

- Roof Flashing slides over DWV pipe for pitch to 40°.
- Made of rust-proof, stamped 28 gauge galvanized steel.
- Non-fading sealing collar.
- Approved for Type B installations.
- Not for hot-mopped or built-up roofs.
- Do not use paint or petroleum based products on rubber collars.

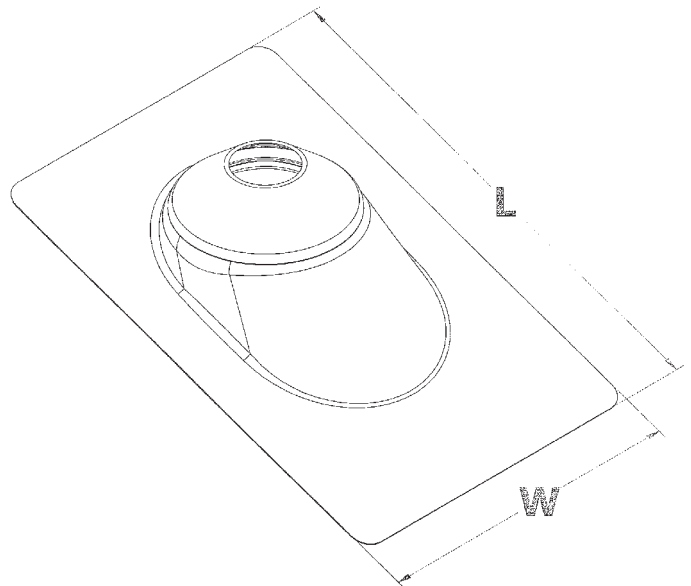

Access BIM/Revit content through www.oatey.com



GALVANIZED BASE NO-CALK® ROOF FLASHINGS TECHNICAL SPECIFICATION

PRODUCT SELECTOR

| GALVANIZED BASE NO-CALK® ROOF FLASHINGS | | | | | | |
|---|----------------|---|------------|-----------|------|---------------|
| ✓ | Product Number | Description | Length (L) | Width (W) | Pack | Carton Weight |
| | 11536 | 1.25" Galvanized ESM Flashing | 12.5 | 8.75 | 25 | 27lbs. |
| | 11549 | 1.5" Galvanized ESM Flashing | 12.5 | 8.75 | 25 | 32lbs. |
| | 11552 | 2" Galvanized ESM Flashing | 14.5 | 10.75 | 25 | 28lbs. |
| | 11565 | 2.5" Galvanized ESM Flashing | 14.5 | 10.75 | 25 | 30lbs. |
| | 11830 | ½" – 1" Galvanized No-Calk Roof Flashing – Solar | 12-½ | 9 | 12 | 11 lbs. |
| | 11831 | ½" – 1" Galvanized No-Calk Roof Flashing – Solar | 18 | 18 | 12 | 23 lbs. |
| | 11840 | 1-¼" – 1-½" Galvanized No-Calk Roof Flashing | 12-½ | 9 | 12 | 12 lbs. |
| | 11841 | 1-¼" – 1-½" Galvanized No-Calk Roof Flashing | 12-½ | 9 | 6 | 6 lbs. |
| | 11853 | 2" Galvanized No-Calk Roof Flashing | 12-½ | 9 | 12 | 12 lbs. |
| | 11854 | 2" Galvanized No-Calk Roof Flashing | 12-½ | 9 | 6 | 7 lbs. |
| | 11866 | 3" Galvanized No-Calk Roof Flashing | 14-½ | 11 | 12 | 17 lbs. |
| | 11867 | 3" Galvanized No-Calk Roof Flashing | 14-½ | 11 | 6 | 9 lbs. |
| | 11879 | 4" Galvanized No-Calk Roof Flashing | 15 | 12 | 12 | 23 lbs. |
| | 11880 | 4" Galvanized No-Calk Roof Flashing | 15 | 12 | 6 | 12 lbs. |
| | 11960 | 1-¼" – 1-½" Galvanized No-Calk Roof Flashing – 28 Gauge | 14 | 14 | 12 | 23 lbs. |
| | 11961 | 2" Galvanized No-Calk Roof Flashing – 28 Gauge | 14 | 14 | 12 | 23 lbs. |
| | 11921 | 1-¼" – 1-½" Large Base Galvanized No-Calk Roof Flashing | 18 | 18 | 12 | 23 lbs. |
| | 11934 | 2" Large Base Galvanized No-Calk Roof Flashing | 18 | 18 | 12 | 23 lbs. |
| | 11947 | 3" Large Base Galvanized No-Calk Roof Flashing | 18 | 18 | 12 | 23 lbs. |
| | 11950 | 4" Large Base Galvanized No-Calk Roof Flashing | 18 | 18 | 12 | 26 lbs. |
| | 11861 | 1,2,3" Galvanized No-Calk Roof Flashing | 14.5 | 11 | 6 | 7 lbs. |
| | 11859 | ½" - 1" Galvanized Black 11" x 14.5" base | 14.5 | 11 | 12 | 8.14 lbs |
| | 11923 | 1 ¼" – 1 ½" Galvanized 18" x18: base | 18 | 18 | 6 | 12.4 lbs |
| | 11936 | 2" Galvanized 18" x 18" base | 18 | 18 | 6 | 12.45 lbs |

Data is subject to manufacturing tolerances.