



SIDEFLASH™ VERTICAL FLASHINGS TECHNICAL SPECIFICATION


Job Name _____	Item # _____
Location _____	
Engineer _____	Contractor _____
PO # _____	Tag _____
Representative _____	

SPECIFICATIONS

Oatey SideFlash Vertical Flashings can be used in commercial and residential applications where a watertight seal of piping penetrations through outside walls is required. SideFlash Vertical Flashings are designed with a tear out collar to accommodate pipe size use from ½" to 2-½" or 3" to 6". SideFlash Vertical Flashings are rated to 180°F.

DESCRIPTION

- All dimensions in inches
- Made of hard plastic base with elastomeric collar.
- Not for use on sloped surfaces.
- Do not use paint or petroleum based products on rubber collars.
- Longer lasting than caulk or foam.
- Seals against air penetration to reduce energy costs.
- Prevents bugs and vermin from entering the structure through opening.

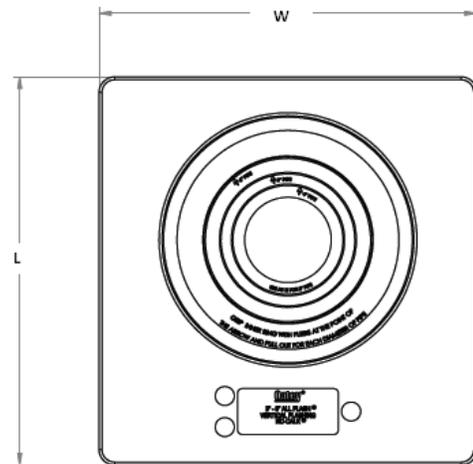

PRODUCT SELECTOR

SIDEFLASH™ VERTICAL FLASHINGS						
✓	Product Number	Description	Length (L)	Width (W)	Pack	Carton Weight
	12805	½" – 2-½" Vertical Flashing	8-½	8	12	3
	12806	3" – 6" Vertical Flashing	12-½	12	12	6

Data is subject to manufacturing tolerances.

Access BIM/Revit content through www.oatey.com