



# TRUE BLUE<sup>®</sup> BATH WASTE ROUGH KIT WITH CONDENSATE ADAPTER

Job Name _____	Item # _____
Location _____	
Engineer _____	Contractor _____
PO # _____	Tag _____
Representative _____	

## SPECIFICATIONS

The Dearborn True Blue Bath Waste shall be used in commercial and residential applications requiring a bath waste and overflow drain with integrated test features. Overflow and drain elbow components shall come factory preassembled for added convenience. Overflow gasket shall be made of a high memory foamed rubber. Drain gasket shall be notched and undercut in order to wrap around drain elbow and lock into place. This will prevent gasket from being knocked off during installation and remain secured to drain elbow regardless of orientation. Test plugs shall be quarter turn installation and must be removable and reusable. Overflow test plug shall be used to install the designer trim veneer with a quarter turn and will not require additional tools or sealants for installation. Faceplate installation shall not require additional tools or screws, symmetrical design will eliminate the need for precise alignment. Condensate Adapter will be .75" Male NPT Threads and will come off of the Overflow Elbow at 45 degrees. The Condensate Adapter will come integrated to the Overflow Elbow and will not require additional solvent weld fittings.


## APPROVALS & LISTINGS

ASME A112.18.2-2015/CSA B125.2-15

 Uniform Plumbing Code (UPC )

 National Plumbing Code of Canada

**IPC** International Plumbing Code (IPC )

 ASME A112.18.2-2015/CSA B125.2-15

Listed with Massachusetts Board of Plumbing


## FEATURES AND MATERIALS

Finish Trim	Tool-Free, Screw-Free Installation
Test Plugs	Reusable, Quarter Turn Tool-Free Installation
Drain Gasket	Locking Rubber Gasket
Overflow Gasket	High Memory Foamed Rubber
Spud	Chrome Plated Brass
Condensate	Integrated Elbow Adapter

## PERFORMANCE SPECIFICATIONS\*

Test Plug Rating	40 FT Head, 17 PSI
Drain Flow Rate	Min. 7 GPM Max. 15.8 GPM depending on finish
Overflow Flow Rate	4.40 GPM

\*Contact [Technical@Oatey.com](mailto:Technical@Oatey.com) for specific flow rates.

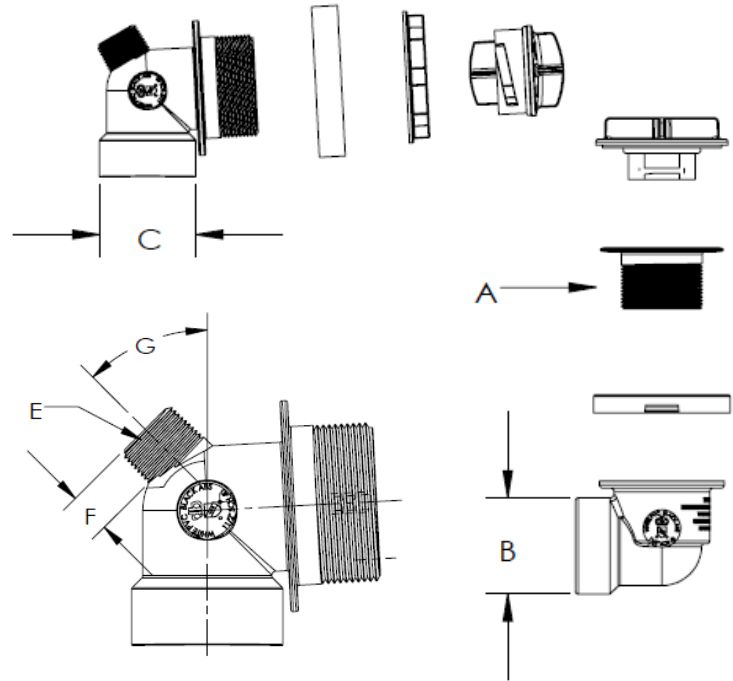

## DIMENSIONS

[A]:	Drain / Spud Thread	1.5" – 11.5 NPSM
[B]:	Inner Diameter	1.5" SCH 40 Pipe
[C]:	Inner Diameter	1.5" SCH 40 Pipe
[E]:	Thread Diameter	.75" – 14 NPT
[F]:	Thread Length	0.6"
[G]:	Thread Angle	45°

Access BIM/Revit content through [www.oatey.com](http://www.oatey.com)



# TRUE BLUE® BATH WASTE ROUGH KIT WITH CONDENSATE ADAPTER

## PRODUCT SELECTOR

TRUE BLUE® BATH WASTE ROUGH KIT WITH CONDENSATE ADAPTER						
✓	Product Number	Material	Stopper Style	Finish	Drain Spud Material	Test Plugs Included
	A9975C	ABS	N/A	CHROME	CHROME PLATED BRASS	YES
	P9975C	PVC	N/A	CHROME	CHROME PLATED BRASS	YES
	P9975ZC	PVC	N/A	CHROME	CHROME PLATED ZINC	YES

TRUE BLUE® BATH WASTE TRIM KIT							
✓	Product Number	Stopper Style	Finish	✓	Product Number	Stopper Style	Finish
	K97WH	TOUCH TOE	WHITE		K98BG	UNI-LIFT	BRUSHED GOLD*
	K97MB	TOUCH TOE	MATTE BLACK		K98BGPS	UNI-LIFT	BRUSHED GOLD*
	K97CP	TOUCH TOE	CHROME		K98CB	UNI-LIFT	CHAMPAGNE BRONZE*
	K97BN	TOUCH TOE	BRUSHED NICKEL		K98CBPS	UNI-LIFT	CHAMPAGNE BRONZE*
	K97RB	TOUCH TOE	OIL RUBBED BRONZE		K99WH	PUSH & PULL	WHITE
	K97BG	TOUCH TOE	BRUSHED GOLD*		K99MB	PUSH & PULL	MATTE BLACK
	K97BGPS	TOUCH TOE	BRUSHED GOLD*		K99CP	PUSH & PULL	CHROME
	K97CB	TOUCH TOE	CHAMPAGNE BRONZE*		K99BN	PUSH & PULL	BRUSHED NICKEL
	K97CBPS	TOUCH TOE	CHAMPAGNE BRONZE*		K99RB	PUSH & PULL	OIL RUBBED BRONZE
	K98WH	UNI-LIFT	WHITE		K99BG	PUSH & PULL	BRUSHED GOLD*
	K98MB	UNI-LIFT	MATTE BLACK		K99BGPS	PUSH & PULL	BRUSHED GOLD*
	K98CP	UNI-LIFT	CHROME		K99CB	PUSH & PULL	CHAMPAGNE BRONZE*
	K98BN	UNI-LIFT	BRUSHED NICKEL		K99CBPS	PUSH & PULL	CHAMPAGNE BRONZE*
	K98RB	UNI-LIFT	OIL RUBBED BRONZE				

\*PVD Finish

Access BIM/Revit content through [www.oatey.com](http://www.oatey.com)