



# TRUE BLUE® BATH WASTE FLEX PVC FULL KIT

Job Name \_\_\_\_\_ Item # \_\_\_\_\_  
 Location \_\_\_\_\_  
 Engineer \_\_\_\_\_ Contractor \_\_\_\_\_  
 PO # \_\_\_\_\_ Tag \_\_\_\_\_  
 Representative \_\_\_\_\_

## SPECIFICATIONS

The Dearborn True Blue Bath Waste Flex PVC Full Kit shall be used in commercial and residential applications requiring a bath waste and overflow drain with integrated test features. The Flexible PVC tubing shall come factory welded to the overflow elbow. Overflow and drain elbow components shall come factory preassembled for added convenience. Overflow gasket shall be made of a high memory foamed rubber. Drain gasket shall be notched and undercut in order to wrap around drain elbow and lock into place. This will prevent gasket from being knocked off during installation and remain secured to drain elbow regardless of orientation. Test plugs shall be quarter turn installation and must be removable and reusable. Faceplate installation shall not require additional tools or screws, symmetrical design will eliminate the need for precise alignment.

## APPROVALS AND LISTINGS

ASME A112.18.2-2015/CSA B125.2-15



Uniform Plumbing Code (UPC®)



National Plumbing Code of Canada



International Plumbing Code (IPC®)



ASME A112.18.2-2015/CSA B125.2-15

Listed with Massachusetts Board of Plumbing


## FEATURES AND MATERIALS

Finish Trim	Tool-Free, Screw-Free Installation
Test Plugs	Reusable, Quarter Turn Tool-Free Installation
Drain Gasket	Locking Rubber Gasket
Overflow Gasket	High Memory Foamed Rubber
Spud	Plated Brass
Overflow Pipe	Flexible PVC Tubular

## PERFORMANCE SPECIFICATIONS\*

Test Plug Rating	40 FT Head, 17 PSI
Drain Flow Rate	Min. 7 GPM Max. 15.8 GPM depending on finish
Overflow Flow Rate	4.40 GPM

\*Contact [Technical@Oatey.com](mailto:Technical@Oatey.com) for specific flow rates.

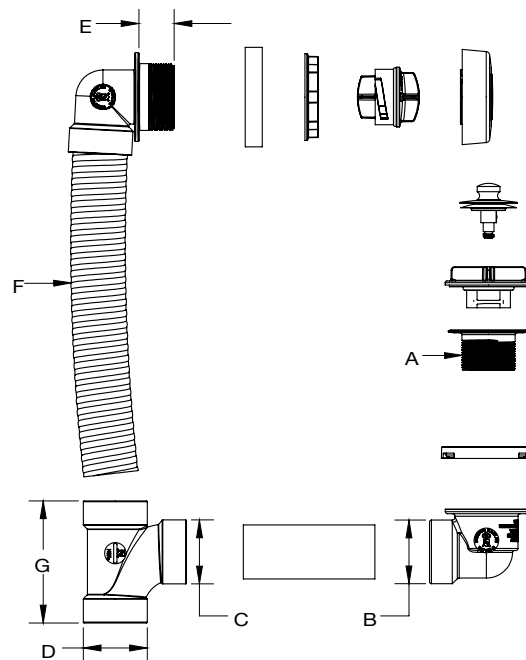

## DIMENSIONS

[A]:	Drain / Spud Thread	1-1/2" / 11.5 NPSM
[B]:	Inner Diameter	1-1/2" SCH 40 Pipe
[C]:	Inner Diameter	1-1/2" SCH 40 Pipe
[D]:	Inner Diameter	1-1/2" SCH 40 Pipe
[E]:	Overflow Depth	1.236"
[F]:	Total Length of Flexible PVC	16" or 24"
[G]:	Height of Tee	4.295"

Access BIM/Revit content through [www.oatey.com](http://www.oatey.com)



**TRUE BLUE®  
BATH WASTE FLEX PVC  
FULL KIT**

**PRODUCT SELECTOR**

TRUE BLUE® BATH WASTE FLEX PVC FULL KIT						
✓	Product Number	Length	Stopper Style	Finish	Drain Spud Material	Test Plugs Included
	16P9860CP	16"	Uni-Lift	Chrome	Brass	Yes
	F16P60BN	16"	Uni-Lift	Brushed Nickel	Brass	Yes
	F16P60RB	16"	Uni-Lift	Oil Rubbed Bronze	Brass	Yes
	F16P60CPZ	16"	Uni-Lift	Chrome	Zinc	Yes
	F16P50CPD	16"	Touch Toe	Chrome	Brass	Yes
	F16P50BN	16"	Touch Toe	Brushed Nickel	Brass	Yes
	16P9850RB	16"	Touch Toe	Oil Rubbed Bronze	Brass	Yes
	F16P985PZ	16"	Touch Toe	Chrome	Zinc	Yes
	16P9840CP	16"	Push N' Pull	Chrome	Brass	Yes
	16P9840BN	16"	Push N' Pull	Brushed Nickel	Brass	Yes
	F16P40RB	16"	Push N' Pull	Oil Rubbed Bronze	Brass	Yes
	F16P40CPZ	16"	Push N' Pull	Chrome	Zinc	Yes
	24P9860CP	24"	Uni-Lift	Chrome	Brass	Yes
	24P9860BN	24"	Uni-Lift	Brushed Nickel	Brass	Yes
	24P9860RB	24"	Uni-Lift	Oil Rubbed Bronze	Brass	Yes
	24P9850CP	24"	Touch Toe	Chrome	Brass	Yes
	24P9850BN	24"	Touch Toe	Brushed Nickel	Brass	Yes
	24P9850RB	24"	Touch Toe	Oil Rubbed Bronze	Brass	Yes
	F24P40CP	24"	Push N' Pull	Chrome	Brass	Yes
	24P9840BN	24"	Push N' Pull	Brushed Nickel	Brass	Yes
	F24P40RB	24"	Push N' Pull	Oil Rubbed Bronze	Brass	Yes

Access BIM/Revit content through [www.oatey.com](http://www.oatey.com)