




designline™

Job Name _____	Item # _____
Location _____	
Engineer _____	Contractor _____
PO # _____	Tag _____
Representative _____	

DESIGNLINE® LINEAR SHOWER DRAINS TECHNICAL SPECIFICATION

DESCRIPTION

Oatey® Designline linear shower drains shall be used in residential and commercial applications when connecting to a DWV system. The drain body is constructed of durable and corrosion resistant 304-grade stainless steel with sloped channel to ensure proper water evacuation. Drain height can be modified using the adjustable leveling feet. The 2 inch PVC outlet adaptor threads into a compatible clamping collar drain base for use with shower pan liner or hot mop waterproofing applications. The decorative cover shall meet all necessary load and flow requirements for installations in shower areas. Drain kit includes a stainless steel debris basket and cover removal tool.

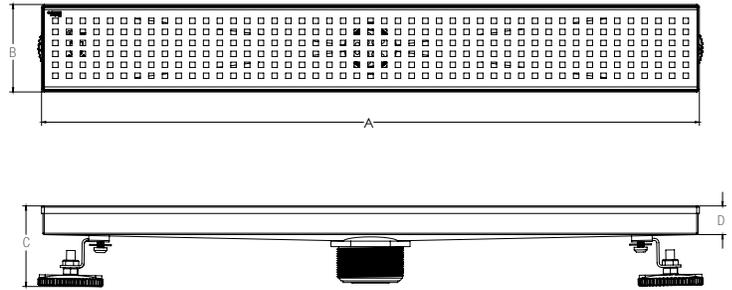

DRAIN ASSEMBLY INCLUDES

- 304 - grade stainless steel drain body
- 304 - grade stainless steel designer grate
- 2 in. PVC threaded outlet adapter
- Lifting key for removal of drain grate
- 304 - grade stainless steel debris basket

REQUIRED PARTS (NOT INCLUDED)

- Oatey 130 Series Shower Pan Drain with clamping collar (ABS or PVC)
- Oatey PVC or CPE shower pan liner
- Oatey X-15 Bonding Adhesive for use with PVC shower pan liner or OateyWeld for use with CPE shower pan liner

130 SERIES SHOWER PAN DRAIN (SOLD SEPARATELY)

ABS or PVC Drain Base with Clamping Collar

Designed for use with tile or marble showers where a shower pan liner is used. The countersunk holes are used to secure the flange base to the subfloor with an approved fastener. The shower pan drain shall have a solvent weld connection over 2" Sch. 40 DWV hub connection or inside 3" Sch. 40 which conforms to ASTM D2665 (PVC) or D2661 (ABS). Base accepts 130 series 1/4 Turn Test Plug, which holds 40 ft of head pressure. Clamp collar ring fastens by use of hex bolts that thread into brass inserts and can be inverted to achieve an additional 1" in finished height. Drain base accepts 2" threaded outlet adapter which connects to Designline stainless steel drain body.

APPROVALS AND LISTINGS

- Uniform Plumbing Code
- International Plumbing Code
- National Plumbing Code of Canada
- ASME A112.18.2-2020 / CSAB125.2-20

DIMENSIONS

[A]:	DL32240BG	24"
	DL32240CB	24"
	DL32240	24"
	DL32240GB	24"
	DLS2240R2	24"
	DLS1240R2	24"
	DL32280	28"
	DLS2280R2	28"
	DLS1280R2	28"
	DLS2320R2	32"
	DLS1320R2	32"
	DLS2360R2	36"
	DLS1360R2	36"
[B]:	3.20"	
[C]:	2.94"	
[D]:	1.05"	

Access BIM/Revit content through www.oatey.com



designline™

DESIGNLINE® LINEAR SHOWER DRAINS TECHNICAL SPECIFICATION

PRODUCT SELECTOR

✓	Product Number	Product Description	Type	Length (in)	Strainer Design	Strainer Finish
	DL32240BG	24 IN. SS LINEAR SQUARE GRATE BRUSHED GOLD	LINEAR	24	SQUARE	BRUSHED GOLD
	DL32240CB	24 IN. SS LINEAR SQUARE GRATE CHAMPAGNE BRONZE	LINEAR	24	SQUARE	CHAMPAGNE BRONZE
	DL32240	24 IN. SS LINEAR DRAIN SQUARE GRATE MATTE BLACK	LINEAR	24	SQUARE	MATTE BLACK
	DL32240GB	24 IN. SS LINEAR DRAIN SQUARE GRATE GOLD & BLACK	LINEAR	24	SQUARE	MATTE BLACK WITH GOLD TRIM
	DLS2240R2	24 IN. SS LINEAR DRAIN SQUARE GRATE RETAIL	LINEAR	24	SQUARE	STAINLESS STEEL
	DLS1240R2	24 IN. SS LINEAR DRAIN TILE-IN GRATE RETAIL	LINEAR	24	TILE-IN	STAINLESS STEEL
	DL32280	28 IN. SS LINEAR DRAIN SQUARE GRATE MATTE BLACK	LINEAR	28	SQUARE	MATTE BLACK
	DLS2280R2	28 IN. SS LINEAR DRAIN SQUARE GRATE RETAIL	LINEAR	28	SQUARE	STAINLESS STEEL
	DLS1280R2	28 IN. SS LINEAR DRAIN TILE-IN GRATE RETAIL	LINEAR	28	TILE-IN	STAINLESS STEEL
	DLS2320R2	32 IN. SS LINEAR DRAIN SQUARE GRATE RETAIL	LINEAR	32	SQUARE	STAINLESS STEEL
	DLS1320R2	32 IN. SS LINEAR DRAIN TILE-IN GRATE RETAIL	LINEAR	32	TILE-IN	STAINLESS STEEL
	DLS2360R2	36 IN. SS LINEAR DRAIN SQUARE GRATE RETAIL	LINEAR	36	SQUARE	STAINLESS STEEL
	DLS1360R2	36 IN. SS LINEAR DRAIN TILE-IN GRATE RETAIL	LINEAR	36	TILE-IN	STAINLESS STEEL

Access BIM/Revit content through www.oatey.com