



designline™

Job Name _____	Item # _____
Location _____	
Engineer _____	Contractor _____
PO # _____	Tag _____
Representative _____	

DESIGNLINE® SQUARE SHOWER DRAINS TECHNICAL SPECIFICATION

DESCRIPTION

Oatey® Designline centerpoint drains shall be used in residential and commercial applications when connecting to a DWV system. The drain body is constructed of durable and corrosion resistant 304-grade stainless steel with sloped drain body to ensure proper water evacuation. Drain height can be adjusted without rotation to meet the finished floor height precisely. The 2 inch PVC outlet adaptor threads into a compatible clamping collar drain base for use with shower pan liner or hot mop waterproofing applications. The decorative cover shall meet all necessary load and flow requirements for installations in shower areas. Drain kit includes a stainless steel debris basket and cover removal tool.

FEATURES AND MATERIALS

- 304 grade stainless steel drain body
- 304 grade stainless steel designer grate
- 2 in. PVC threaded outlet adaptor
- Lifting key for removal of drain grate
- 304 grade stainless steel debris basket

REQUIRED PARTS (NOT INCLUDED)

- Oatey 130 Series Shower Pan Drain with clamping collar (ABS or PVC)
- Oatey PVC or CPE shower pan liner
- Oatey X-15 Bonding Adhesive for use with PVC shower pan liner or OateyWeld for use with CPE shower pan liner



130 SERIES SHOWER PAN DRAIN (SOLD SEPARATELY)

ABS or PVC Drain Base with Clamping Collar

Designed for use with tile or marble showers where a shower pan liner is used. The countersunk holes are used to secure the flange base to the subfloor with an approved fastener. The shower pan drain shall have a solvent weld connection over 2" Sch. 40 DWV hub connection or inside 3" Sch. 40 which conforms to ASTM D2665 (PVC) or D2661 (ABS). Base accepts 130 series 1/4 Turn Test Plug, which holds 40 ft of head pressure. Clamp collar ring fastens by use of hex bolts that thread into brass inserts and can be inverted to achieve an additional 1" in finished height. Drain base accepts 2" threaded outlet adapter which connects to Designline stainless steel drain body.

APPROVALS AND LISTINGS

- Uniform Plumbing Code
- International Plumbing Code
- National Plumbing Code of Canada
- ASME A112.18.2 / CSAB125.2v

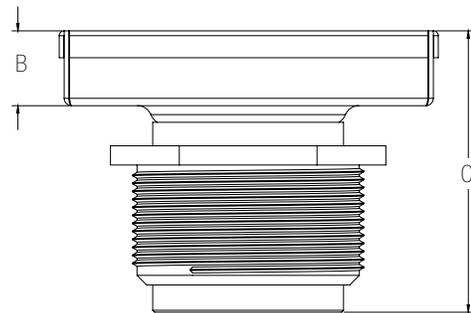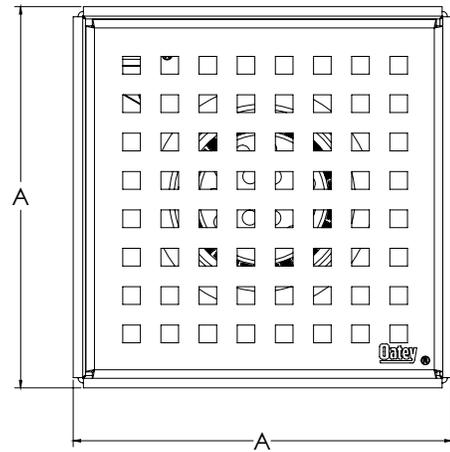

DIMENSIONS

[A]:	DS32040BG	4"
	DS32040CB	4"
	DS32040	4"
	DS32040GB	4"
	DSS2040R2	4"
	DS32060BG	6"
	DS32060CB	6"
	DS32060	6"
	DS32060GB	6"
	DSS2060R2	6"
	DSS1040R2	4"
	DSS1060R2	6"
	[B]:	0.78"
[C]:	2.93"	

Access BIM/Revit content through www.oatey.com



designline™

DESIGNLINE® CENTERPOINT SHOWER DRAINS TECHNICAL SPECIFICATION

PRODUCT SELECTOR

✓	Product Number	Product Description	Type	Length (in)	Strainer Design	Strainer Finish
	DS32040BG	4 X 4 IN SQUARE DRAIN SQUARE GRATE BRUSHED GOLD	POINT	4x4 in.	SQUARE	BRUSHED GOLD
	DS32040CB	4 X 4 IN SQUARE DRAIN SQUARE GRATE CHAMPAGNE BRONZE	POINT	4x4 in.	SQUARE	CHAMPAGNE BRONZE
	DS32040	4 X 4 IN SQUARE DRAIN SQUARE GRATE MATTE BLACK	POINT	4x4 in.	SQUARE	MATTE BLACK
	DS32040GB	4 X 4 IN SQUARE DRAIN SQUARE GRATE GOLD & BLACK	POINT	4x4 in.	SQUARE	MATTE BLACK WITH GOLD TRIM
	DSS2040R2	4 X 4 IN SQUARE DRAIN SQUARE GRATE RETAIL	POINT	4x4 in.	SQUARE	STAINLESS STEEL
	DS32060BG	6 X 6 IN SQUARE DRAIN SQUARE GRATE BRUSHED GOLD	POINT	6x6 in.	SQUARE	BRUSHED GOLD
	DS32060CB	6 X 6 IN SQUARE DRAIN SQUARE GRATE CHAMPAGNE BRONZE	POINT	6x6 in.	SQUARE	CHAMPAGNE BRONZE
	DS32060	6 X 6 IN SQUARE DRAIN SQUARE GRATE MATTE BLACK	POINT	6x6 in.	SQUARE	MATTE BLACK
	DS32060GB	6 X 6 IN SQUARE DRAIN SQUARE GRATE GOLD & BLACK	POINT	6x6 in.	SQUARE	MATTE BLACK WITH GOLD TRIM
	DSS2060R2	6 X 6 IN SQUARE DRAIN SQUARE GRATE RETAIL	POINT	6x6 in.	SQUARE	STAINLESS STEEL
	DSS1040R2	4 X 4 IN SQUARE DRAIN TILE-IN GRATE RETAIL	POINT	4x4 in.	TILE-IN	STAINLESS STEEL
	DSS1060R2	6 X 6 IN SQUARE DRAIN TILE-IN GRATE RETAIL	POINT	6x6 in.	TILE-IN	STAINLESS STEEL

Access BIM/Revit content through www.oatey.com