



vivante™

SHOWER DRAIN


Job Name _____	Item # _____
Location _____	
Engineer _____	Contractor _____
PO # _____	Tag _____
Representative _____	

VIVANTE™ LINEAR SHOWER DRAINS

TECHNICAL SPECIFICATION

DESCRIPTION

Oatey Vivante™ linear shower drains shall be used for tiled showers in residential and commercial applications when connecting to a DWV system. The drain body is constructed of durable and corrosion resistant 304-grade stainless steel with sloped channel to ensure proper water evacuation. Drain height can be modified using the adjustable leveling feet. The 2 in. PVC threaded outlet adapter threads into a compatible clamping collar drain base for use with shower pan liner or hot mop waterproofing applications. The decorative cover shall meet all necessary load and flow requirements for installations in shower areas. Drain kit includes a stainless steel debris basket and lifting key.

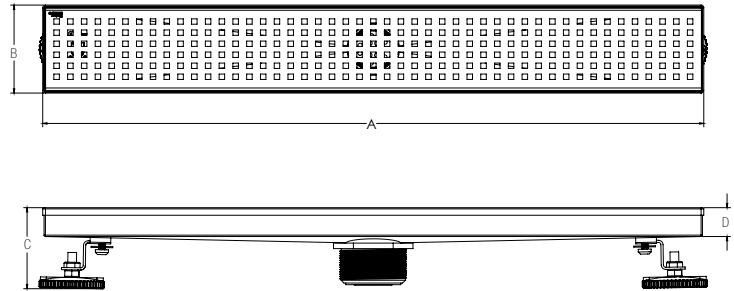

FEATURES AND MATERIALS

- 304-grade stainless steel designer grate, drain body & debris basket
- Flow Rate: 10 GPM
- 2 in. PVC threaded outlet adapter
- Lifting key for removal of drain grate
- 304-grade stainless steel debris basket

REQUIRED PARTS (NOT INCLUDED)

- 3-Piece clamping collar shower pan drain (Oatey 130 Series equivalent in PVC, ABS or cast iron for hot mop)
- Oatey PVC or CPE shower pan liner
- Oatey X-15 Bonding Adhesive for use with PVC shower pan liner or OateyWeld for use with CPE shower pan liner

130 SERIES SHOWER PAN DRAIN (SOLD SEPARATELY)

ABS or PVC Drain Base with Clamping Collar

Designed for use with tile or marble showers where a shower pan liner is used. The countersunk holes are used to secure the flange base to the subfloor with an approved fastener. The shower pan drain shall have a solvent weld connection over 2 in. Sch. 40 DWV hub connection or inside 3 in. Sch. 40 which conforms to ASTM D2665 (PVC) or D2661 (ABS). Base accepts 130 series 1/4 Turn Test Plug, which holds 40 ft of head pressure. Clamp collar ring fastens by use of hex bolts that thread into brass inserts and can be inverted to achieve an additional 1 in. in finished height. Drain base accepts 2 in. threaded outlet adapter which connects to Designline stainless steel drain body.

APPROVALS AND LISTINGS

- Uniform Plumbing Code
- International Plumbing Code
- National Plumbing Code of Canada
- ASME A112.18.2 / CSAB125.2

DIMENSIONS

[A]:	VT1240	24 IN.
	VT2240	
	VT32240	
	VT32240GB	
	VT32240BG	
	VT32240GM	
	VT1280	28 IN.
	VT2280	
	VT1360	36 IN.
[B]:	3.20 IN. (3-3/16 IN.)	
[C]:	2.94 IN. (2-15/16 IN.)	
[D]:	1.05 IN. (1-1/16 IN.)	

Access BIM/Revit content through www.oatey.com



VIVANTE™ LINEAR SHOWER DRAINS
TECHNICAL SPECIFICATION

PRODUCT SELECTOR

✓	PRODUCT NUMBER	PRODUCT DESCRIPTION	TYPE	LENGTH (IN)	GRATE DESIGN	FINISH		
	VT1240	24 IN. SS LINEAR DRAIN TILE-IN GRATE RETAIL	LINEAR	24 IN.	TILE-IN	STAINLESS STEEL		
	VT2240	24 IN. SS LINEAR DRAIN SQUARE GRATE RETAIL			SQUARE		MATTE BLACK WITH GOLD TRIM	
	VT32240	24 IN. SS LINEAR DRAIN SQUARE GRATE MATTE BLACK				BRUSHED GOLD		
	VT32240GB	24 IN. SS LINEAR DRAIN SQUARE GRATE GOLD & BLACK						GUNMETAL GRAY
	VT32240BG	24 IN. SS LINEAR DRAIN SQUARE GRATE BRUSHED GOLD						
	VT32240GM	24 IN. SS LINEAR DRAIN SQUARE GRATE GUNMETAL GRAY						
	VT1280	28 IN. SS LINEAR DRAIN TILE-IN GRATE RETAIL		28 IN.	TILE-IN	STAINLESS STEEL		
	VT2280	28 IN. SS LINEAR DRAIN SQUARE GRATE RETAIL			SQUARE			
	VT1360	36 IN. SS LINEAR DRAIN TILE-IN GRATE RETAIL		36 IN.	TILE-IN			